


# MICRO-LET™ MJ-300/MJ-320

Specifications	
MJ-300/320 Out body Meas.	(H) 110 mm (4.3 in) (W) 65 mm (2.6 in) (L) 25 mm ( 1 in)
Weight	60g
Fuel	IRODA RC-30 Refill cartridge, Disposable Lighter or similar product (Except childproof)
Hours of nonstop burning	Approx 20 minutes (per disposable lighter)
Temp.	1300°C/2400°F(Blue flame)

Packing		
Item	MJ-300	MJ-320
Packing (Inner Box/Carton)	20 / 120	20 / 120
Packaging	Bilister/Card	Bilister/Card
Master Carton (L x W x H cm)	71.8x33.3x28.8	71.8x33.3x28.8
CU.FT.	2.4'	2.4'
N.W. (kg)	11.5	11.5
G.W. (kg)	12.7	12.7

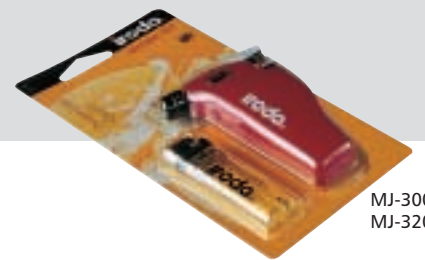

MJ-300  
MJ-320



Cordless Butane Products At The Leading Edge

## Piezo Electronic Ignition System Compliant with CPSC Regulations (MJ-320)

### Applications:

A MUST FOR

- Camping
- First Aid / Survival Kits
- Household Repairs
- Laboratories
- Thawing Frozen Locks

IDEAL FOR

- Hobbies
- Do-It-Yourself Repairs
- Odd Jobs
- Heat Shink Tubing and Connectors
- Cigar and Pipe Lighter

### Features:

Piezo Electronic Ignition system with safety locking switch (MJ-300) or Child Resistant Ignition (MJ-320).  
Powered by IRODA refillable RC-30 or readily available disposable lighters.  
Flame temperature up to 1300°C(2400°F)  
Windproof flame and waterproof ignition make the MICRO-JET™ ideal for camping and outdoor use.  
Compact size allows the unit to fit easily into any first aid/survival kit or tool kit.



1300°C / 2400°F



# MICRO-JET™ MJ-300/MJ-320

**CHILD RESISTANT**  
Compliant with CPSC Regulations

- Instant 1300°C/2400°F Microflame
- Auto-Ignition
- Pocket Size
- Powered By Normal Cigarette Lighter



Patents Pending  
Worldwide

Colors:

