

SOLDERPRO™ 110

Specifications		
Length: W/Cap	248 mm (9.76 in)	
W/Soldering tip	233 mm (9.18 in)	
Weight (when gas-filled)	122 g	
Approximate temperature soldering tip	250~550°C (480~1000°F)	
Torch	1300°C (2400°F)	
Gas container capacity	25 ml	
Operating capacity (one gas filling)	160 min. at mid setting	

Packing		
Item	PRO-110	PRO-110K
Packing (Inner Box/Carton)	12 / 48	12 / 24
Packaging	Blister/ Card	Tool Case W/ Color Box
Master Carton (L x W x H cm)	45.8x42.1x33.3	58.5x33x38.8
CU.FT.	2.2'	2.6'
N.W. (kg)	8.5	15.2
G.W. (kg)	10	17.2



PRO-110

PRO-110K

SOLDERPRO™ 110

30W-125W POWER RANGE

Cordless Butane Products At The Leading Edge

Automatic Ignition Portable Multi-function Heat Tool

Applications:

- Automotive and truck repairs
- Aviation service and repair
- Electrical components
- Environmental splicing
- Infield repairs
- Insulated solder preform
- Jewelry repair
- Loosen rusted nuts and bolts
- Maintain switch panels
- Repair television sets, meters, switch boards
- Sensitive IC boards
- Shrink tubing
- Silver solder
- Soften window caulking
- Solder circuit boards
- TV cable systems
- Weld plastics

Features:

- Equivalent to a power range 30-125 Watt.
- Cordless, simple, safe operation anywhere.
- Ready to use 15 seconds after ignition.
- Tank capacity for 160 minutes of operation.
- No cords, can be used anywhere.
- No electrical interference.
- Comes with soldering tip and protective cap.



30W-125W POWER RANGE




PRO-110

SOLDERPRO™ 110

High Power model equal to our Industry Standard Pro-120 with a lightweight colorful profile.

Basic Tips

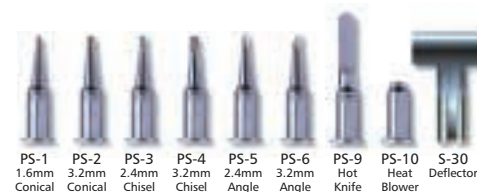

PS-1 1.6mm Conical
PS-2 3.2mm Conical
PS-3 2.4mm Chisel
PS-4 3.2mm Chisel
PS-5 2.4mm Angle
PS-6 3.2mm Angle
PS-9 Hot Knife
PS-10 Heat Blower
S-30 Deflector

Patents Pending
Worldwide

Colors:

