

# PRO-TORCH™ PT-500

Specifications	
Height	175 mm (6.90 in)
Length	120 mm (4.73 in)
Grip Dia.	45 mm (1.78 in)
Base Dia.	65 mm (2.56 in)
Weight w/o fuel	300 g
Torch	1350°C (2500°F)
Gas container capacity	60 ml
Operating capacity (one gas filling)	90 min. (at mid setting)

Packing	
Item	PT-500
Packing (Inner Box/Carton)	6 / 24
Packaging	Color Box
Master Carton (L x W x H cm)	51.2x41.8x33.9
CU.FT.	2.5'
N.W. (kg)	9.7
G.W. (kg)	12.9



PT-500

## PRO-TORCH™ 500 1350°C / 2500°F

Heavy Duty, Stable Flame, Ergonomic Grip

Cordless Butane Products At The Leading Edge


### Automatic Ignition Butane Powered Pro Torch

#### Applications:

- Brazing
- Soldering
- Dental Repairs
- Chef's Torch
- Plumbing
- Optometry Labs
- Tool and Die Shops
- Automotive and Truck Repairs
- Industrial Maintenance
- Electronic Repairs

#### Features:

- State of the art Waterproof Piezo Electronic Ignition system.
- Up to 120 minutes use on each filling.
- Powerful Wind-Resistant flame.
- Sturdy heavy duty ribbed aluminum body with comfort grip.
- Easily refilled with any brand of butane gas.
- High output flame for large jobs.

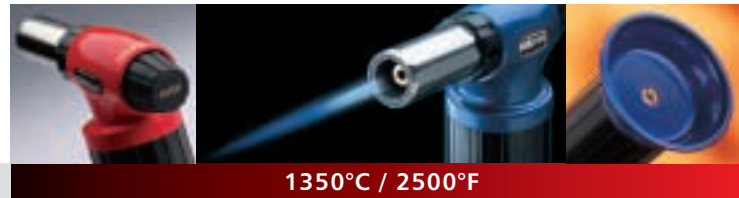

1350°C / 2500°F

# PRO-TORCH PT-500

The heavy duty PT-500 provides the most powerful and stable butane flame available for demanding jobs where the highest BTU output is required. Its precision orifice and controls offer the best there is in a high output butane tool. The ergonomic grip makes using the PT-500 comfortable at most any angle. PT-500 was designed with features to withstand the rigors of daily professional use.



PT-500



Patents Pending  
Worldwide

Colors: