

THERMOGLUE™ TG-800

Specifications	
Item	TG-800
Length:	240mm(9.4 in)
Height :	195mm(7.7 in)
Weight (when gas-filled)	450g
Temperature	165~220°C / 330~430°F
Gas container capacity	40 ml (LEC)
Operating capacity (one gas filling)	100 minutes.

Packing	
Item	TG-800
Packing (Inner Box/Carton)	6 / 12
Packaging	Double Blister/ Card
Master Carton (L x W x H cm)	65.7x33.3x34.9
CU.FT.	2.7'
N.W. (kg)	8.2
G.W. (kg)	10.2



TG-800

THERMOGLUE 800
PATENTED NON-CLOGGING DESIGN

Butane Powered with Removable Refillable LEC™
(LEC=Liquid Energy Cell)

Cordless Butane Products At The Leading Edge


Butane Powered Glue Gun
No Cord! No Limits! Completely portable, work almost anywhere!

Applications:

- Automotive interior panel replacement and upholstery repair
- Exterior Automotive Trim
- Sign making and repair
- Furniture repair and upholstery
- Flooring and tile repairs
- Window Trim repairs
- Decorative adhesion
- Industrial Packaging
- Leatherworking
- Industrial Mock-Ups and Prototypes
- Architectural & Engineering Models
- Professional Artwork.
- Crafts

Features:

- Powered by LEC technology for quick refueling and secure travel.
- Ergonomic palm feed system for less hand fatigue.
- Rugged design with the most durable impact resistant polymers used throughout.
- Fast, easy start up with push button Piezo ignition, reaches working temperature in just 3 minutes.
- Reliable continuous non clogging and stable heat operation.
- Thermostat Precision temperature control range from 165°C/330°F to 220°C/430° F.
- Power and durability to get the job done in industrial and DIY applications.
- Runs continuously for up to 100 minutes on easily refilled butane LEC.
- Fast, even adhesive flow with standard 1/2"(12 mm) diameter glue sticks.
- Instant glue flow cut-off reduces dripping.

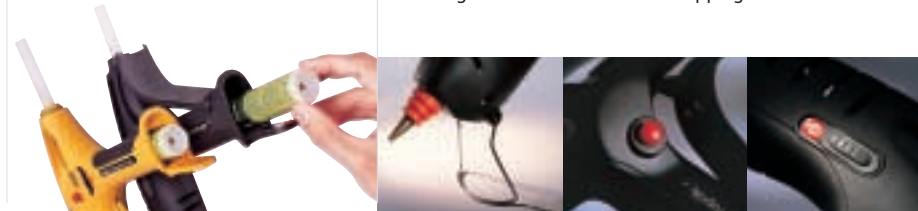

PATENTED NON-CLOGGING DESIGN

THERMOGLUE™ TG-800



Colors:

Completely portable, lets you work almost anywhere. Power and durability to get the job done in industrial applications. Runs continuously for up to 100 minutes per full LEC. Refill LEC in seconds. Patented Thermostatic Control for precise temperature at the range of 165°C/330°F to 220°C/430°F. Reaches working temperature in just 3 minutes. Fast, even adhesive flow with standard 1/2" (12mm) diameter glue sticks. Instant glue flow cut-off reduces dripping.

Patents Pending
Worldwide

